

LINEAR MOTION SOLUTIONS

Simplicity® Self-lubricated Bearings, Guides, Systems & Slides



Low Profile Redi-Rail

RRL 34 LINEAR GUIDE COMPONENTS




Low profile linear guides are ideal for clean room, automation and material handling applications.

SAVE  **TIME & MONEY**

- **Low profile design – 19 mm or 24 mm overall height**
- **Sealed double row bearings**
- **Gothic arch rollers increase load capacity**
- **Fixed or adjustable preloads**
- **Lightweight aluminum rail with steel or stainless steel shaft options**
- **FDA compliant version available**
- **Maximum operating temperatures**
80° C (180° F)


(3) CARRIAGE STYLES

Each with fixed roller or eccentric adjustable roller options

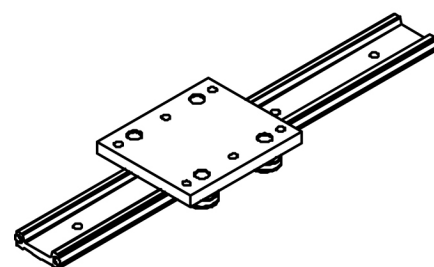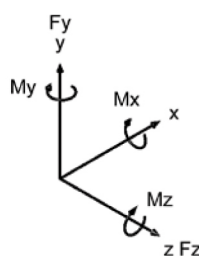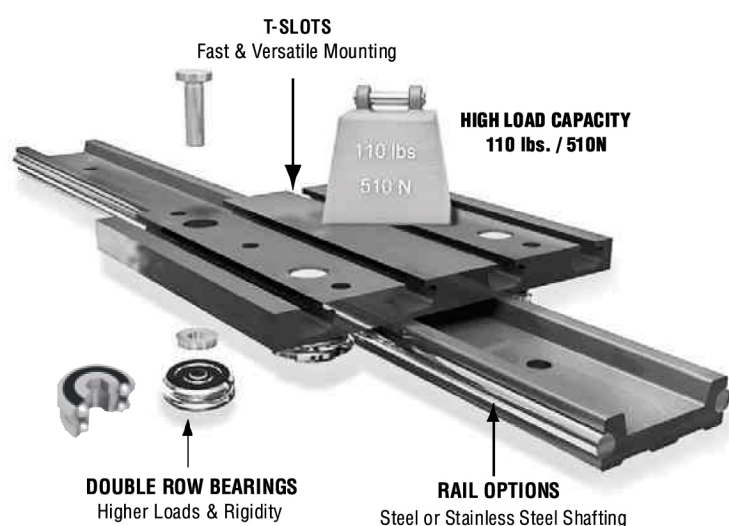



LOAD CAPACITY									
Fy		Fz		Mx		My		Mz	
(N)	(lbs.)	(N)	(lbs.)	(N-m)	(lbs.-in.)	(N-m)	(lbs.-in.)	(N-m)	(lbs.-in.)
510	110	1,220	270	14	120	31	270	13	110

DIMENSIONAL DATA

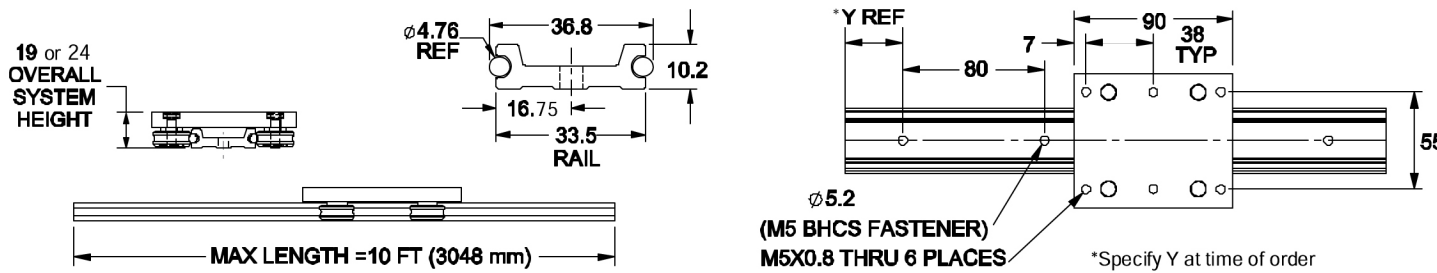

STANDARD FIXED BEARING CARRIAGES


OPTIONAL ADJUSTABLE BEARING CARRIAGES

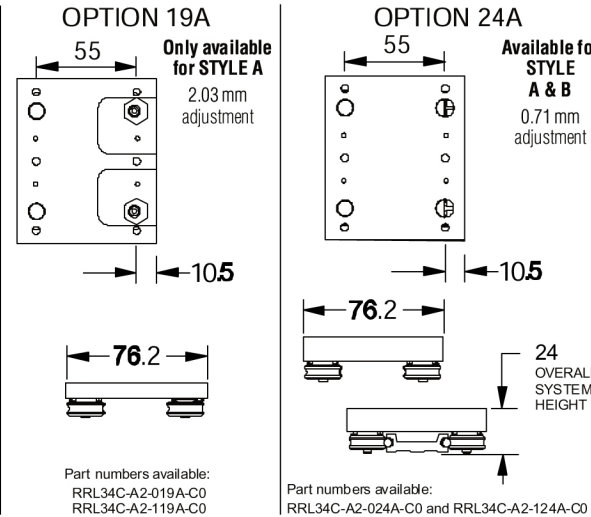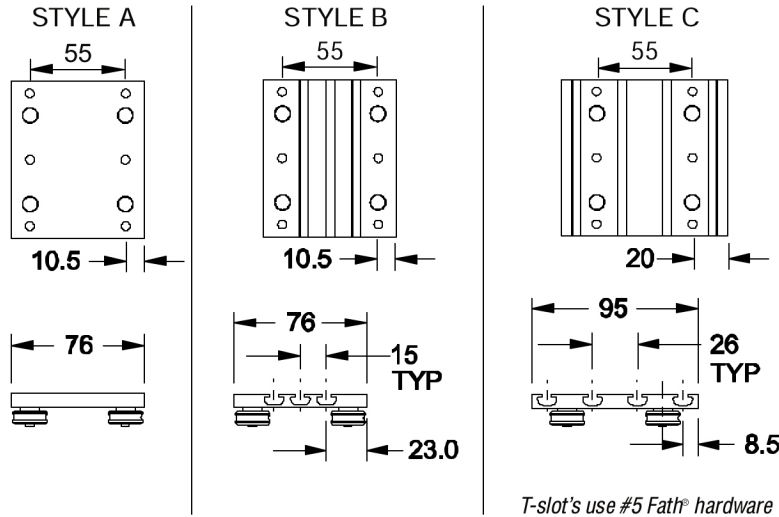

ORDER INFORMATION


RAIL



EXAMPLE: RRL34R-0500-R0

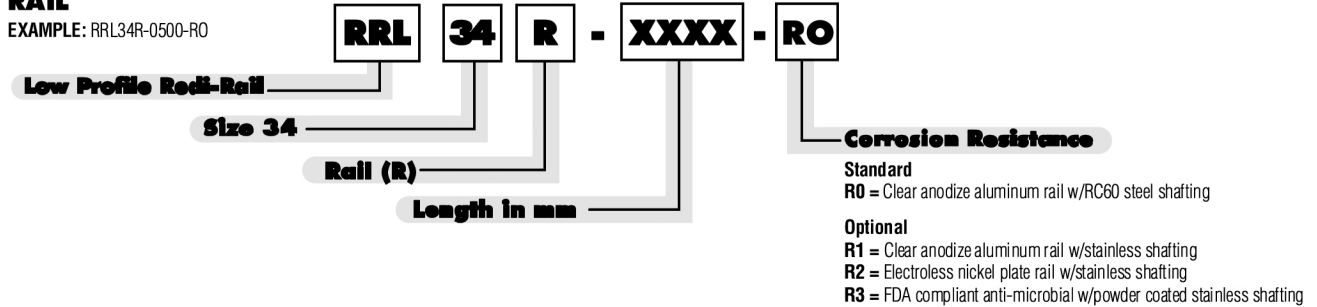

CARRIAGE

EXAMPLE: RRL34C-A22-219A-R0

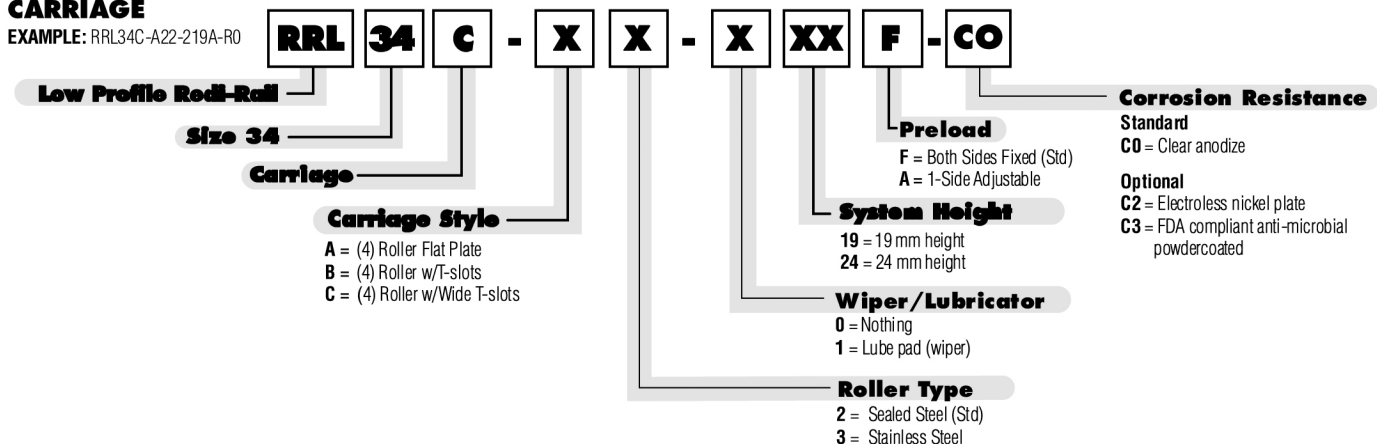

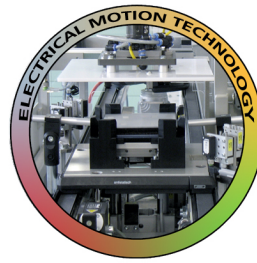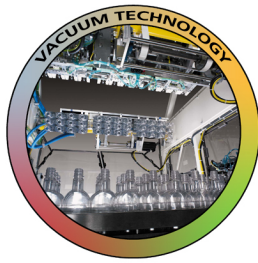

We look forward to your application.

LDA Belgium

Hoge Buizen 53
1980 Eppegem
Belgium

Tel. +32 (0)2-266 13 13

Mail: LDA@LDA.be

www.LDA.be