




Savatech multi-size plugs PLUGY G and PLUGSY GM are used for sealing and testing of pipelines and gas pipelines with a restricted inlet area. Their innovative design and flexibility simplify handling and insertion.

Special elliptical shape

Very small insertion diameter required

Highly flexible

Also available in oil-resistant version

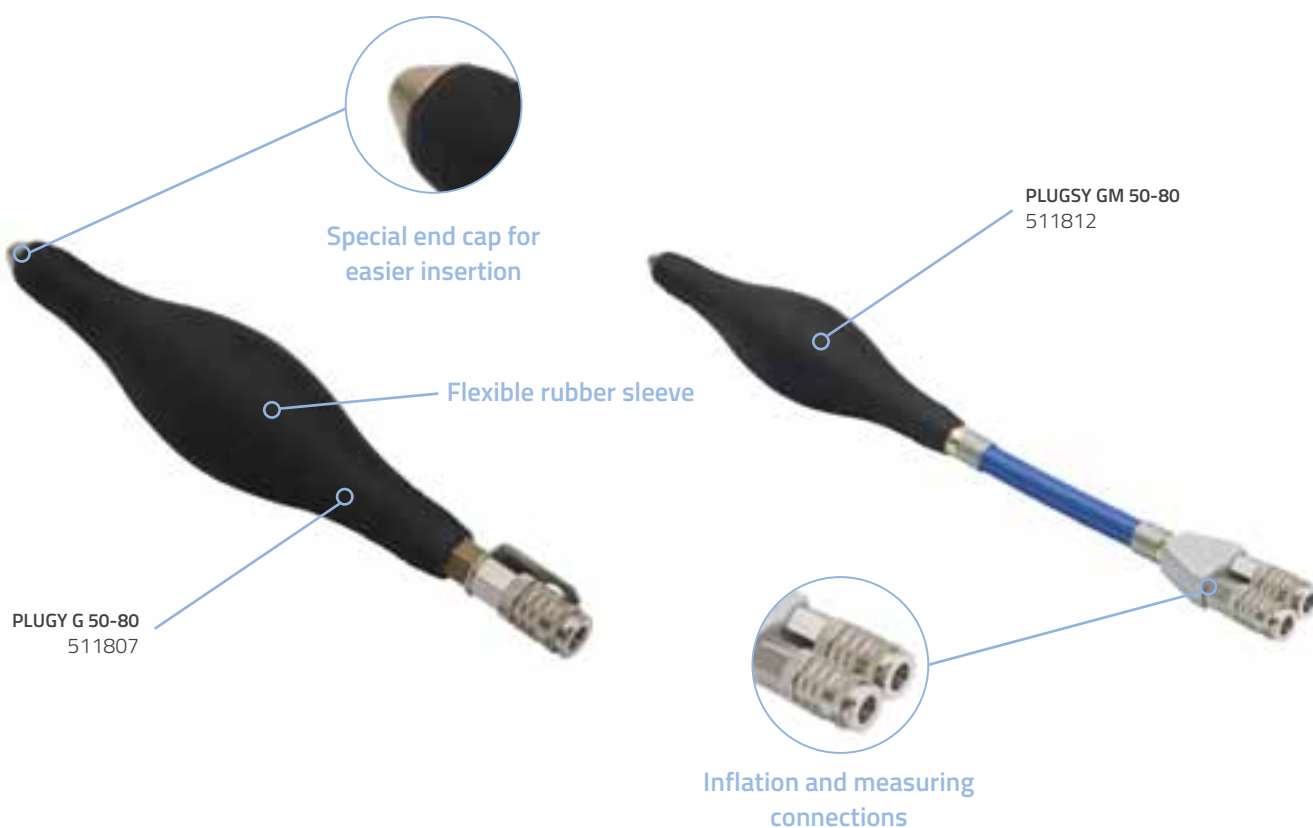

ACCESSORIES



INFLATION HOSE,
10 M, RED, 1.2 KG
74268



INFLATION HOSE,
10 M, BLUE, 1.2 KG
71248



INFLATION HOSE,
10 M, YELLOW, 1.2 KG
76686

ACCESSORIES



SINGLE FITTING
CONTROLLER,
2.5 BAR, 0.9 KG
60310

SINGLE FITTING
CONTROLLER,
3.0 BAR, 0.9 KG
537048

SINGLE FITTING
CONTROLLER,
1.5 BAR, 0.9 KG
74609

SINGLE FITTING
CONTROLLER,
2.0 BAR, 0.9 KG
565643



POLY LIFT INFLATION HOSE,
5 M, 1.9 KG
60957

POLY LIFT INFLATION HOSE,
10 M, 2.4 KG
60958

PLUGY G - BLOCKING PLUGS

PART NUMBER	NOMINAL SIZE	SIZE USAGE RANGE		REQUIRED INFLATION PRESSURE (BAR)	MAX. ALLOWED BACK PRESSURE (BAR)	DEFLATED PLUG		DIAMETER FOR INSERTION (MM)	PRODUCT WEIGHT (KG)	INFLATION VALVE
		MIN. DIA. (MM)	MAX. DIA. (MM)			DIAMETER (MM)	LENGTH (MM)			THREAD SIZE
511807	50-80	50	80	3	1	45	280	35	0.29	R 1/4"
511808	80-130	80	130	2.5	1	76	360	40	0.37	R 1/4"
511809	100-160	100	160	2	1	98	420	45	0.56	R 3/8"
511810	150-210	145	210	2	1	140	510	50	0.78	R 3/8"
511811	200-315	200	315	2	1	200	730	70	1.25	R 3/8"
519420	315-500	315	500	1.5	0.8	315	950	90	1.45	R 3/8"

PLUGSY GM - BYPASS PLUGS

PART NUMBER	NOMINAL SIZE	SIZE USAGE RANGE		REQUIRED INFLATION PRESSURE (BAR)	MAX. ALLOWED BACK PRESSURE (BAR)	DEFLATED PLUG		DIAMETER FOR INSERTION (MM)	PRODUCT WEIGHT (KG)	INFLATION VALVE	BYPASS DIAMETER (MM)
		MIN. DIA. (MM)	MAX. DIA. (MM)			DIAMETER (MM)	LENGTH (MM)			THREAD SIZE	
511812	50-80	45	80	3	1	45	490	35	0.71	R 1/4"	5
511813	80-130	75	130	2.5	1	76	570	40	0.79	R 1/4"	5
511814	100-160	100	160	2	1	98	645	45	1.01	R 3/8"	7
511815	150-210	145	210	2	1	140	760	50	1.22	R 3/8"	7
511816	200-315	200	315	2	1	200	1060	70	1.72	R 3/8"	7
519421	315-500	315	500	1.5	0.8	315	1280	90	1.9	R 3/8"	7