



The construction of Savatech multi-size long plugs PLUGY DC ensures efficient sealing of both connection and the main pipe at the same time. Savatech PLUGY DC are equipped with a 100 cm long supply hose.



Special inflation
sequence

Sealing of main and lateral pipes
simultaneously

Equipped with
inflation hose

PLUGY DC 75-100
60074



Start of inflation process


ACCESSORIES



INFLATION HOSE, FI 6 MM,
2 M, 0.2 KG
78904




INFLATION HOSE FI 6 MM,
5 M, 0.5 KG
78905




HAND PUMP, 0.8 KG
60010


HANDLING

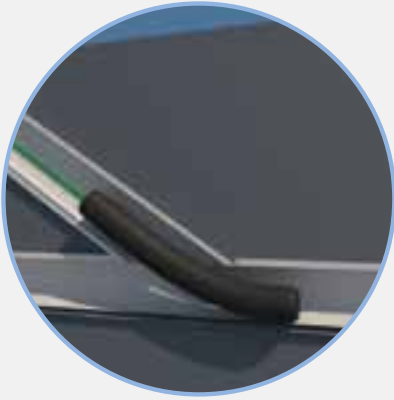

INSERT THE PLUG IN THE MIDDLE
OF A CONNECTION

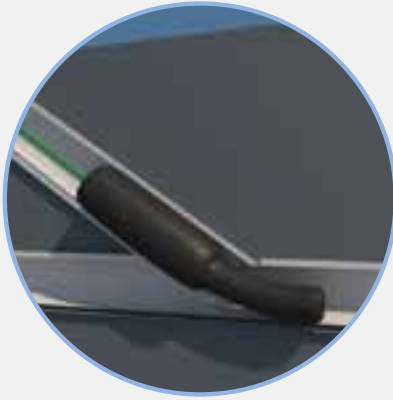

IN THE FIRST PHASE, THE UPPER
PLUG PART IS INFLATED TO
PREVENT LIQUID SPILLS

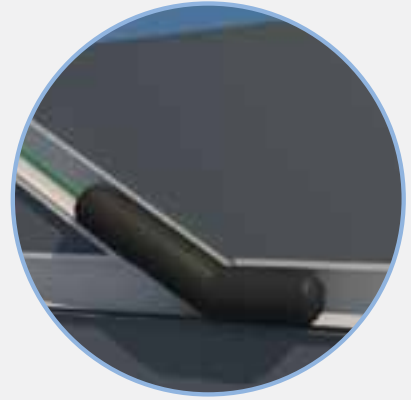

IN THE SECOND PHASE, THE
REMAINING PART OF THE PLUG IS
INFLATED TO COMPLETELY STOP
THE FLOW

PLUGY DC – BLOCKING PLUGS

PART NUMBER	NOMINAL SIZE	SIZE USAGE RANGE		REQUIRED INFLATION PRESSURE (BAR)	DEFLATED PLUG		PRODUCT LENGHT (MM)	PRODUCT WEIGHT (KG)	EYE BOLT	INFLATION VALVE
		MIN. DIA. (MM)	MAX. DIA. (MM)		DIAMETER (MM)	BODY LENGTH (MM)			M THREAD	THREAD SIZE
60073	50-75	50	75	2.5	40	490	550	0.7	NA	TR 15
60074	75-100	75	100	2.5	60	550	610	1.2	NA	TR 15
60075	100-150	100	150	2.5	80	750	810	1.8	NA	TR 15
60076	150	150	150	2.5	100	730	790	2.6	NA	TR 15

BACK PRESSURES (bar)* – PLUGY DC

PLUG SIZE	PIPE DIAMETER (MM)			
	50	75	100	150
50-75	2.2	2		
75-100		2.1	1.9	
100-150			2	1.8
150				1.9

* measured in a dry iron pipe